

FIG. 1

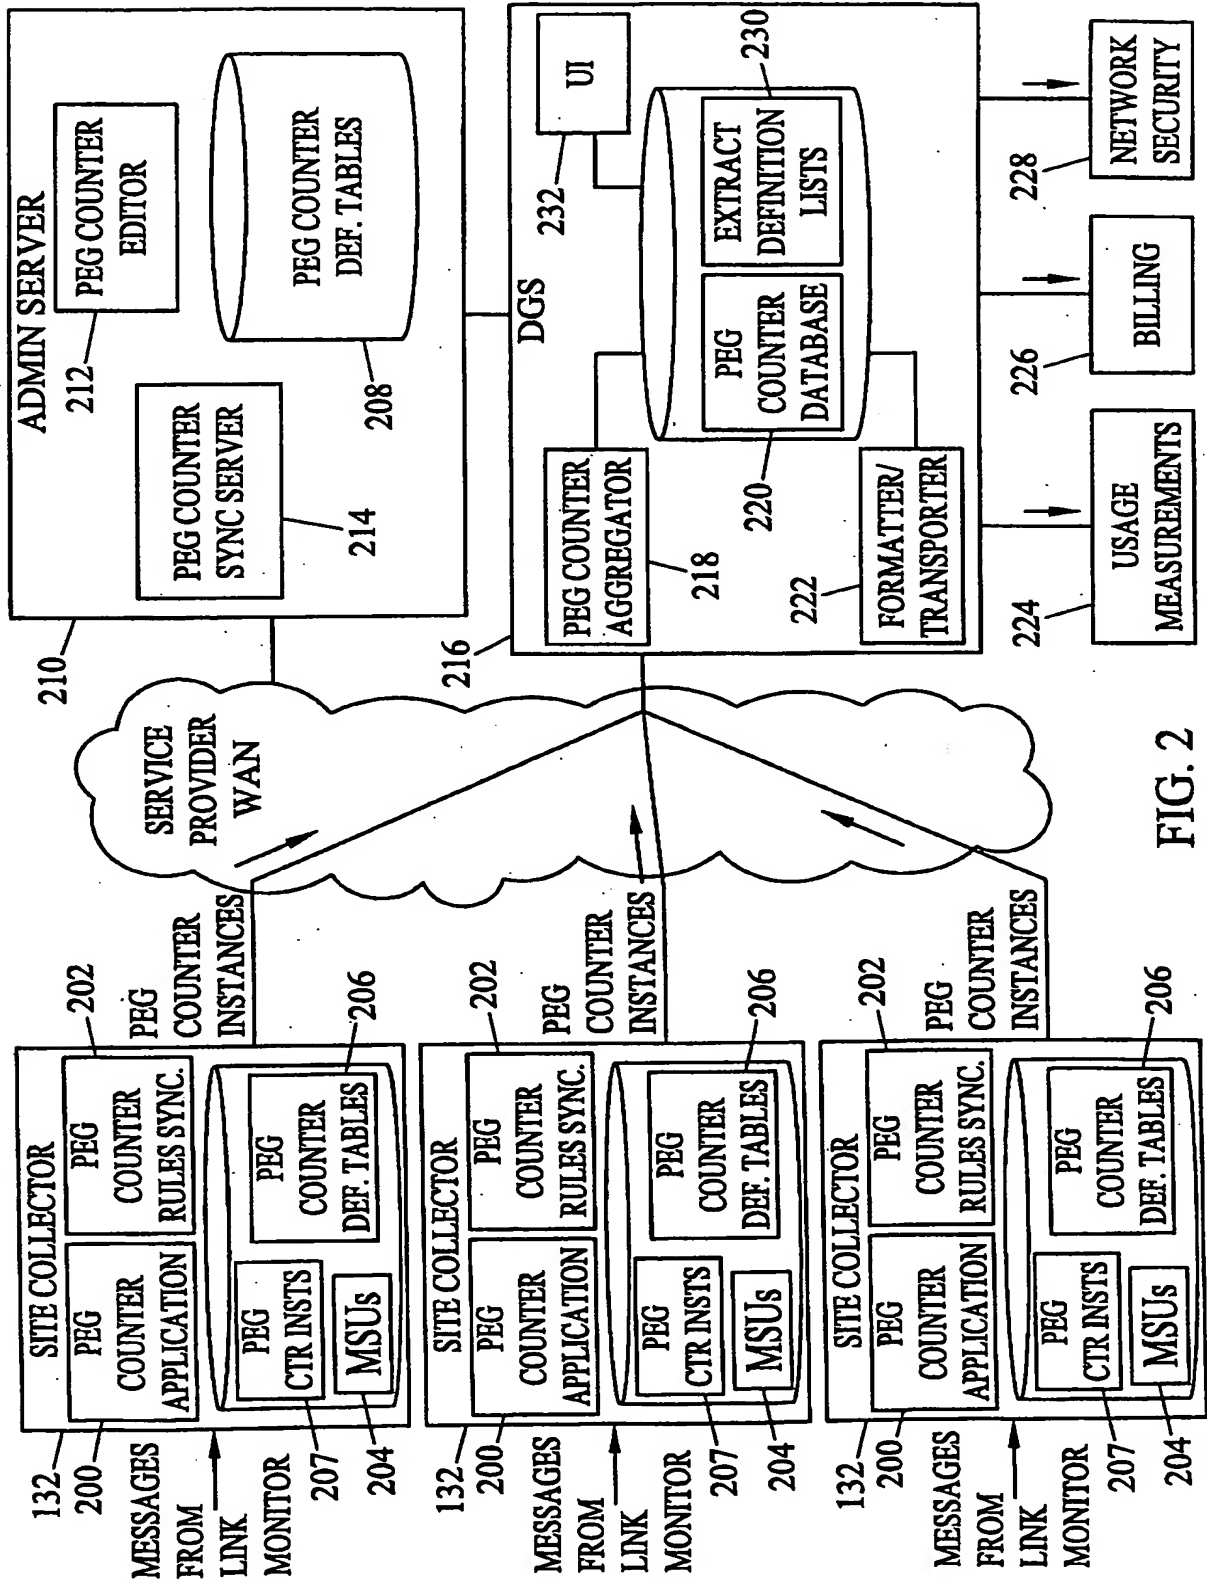


FIG. 2

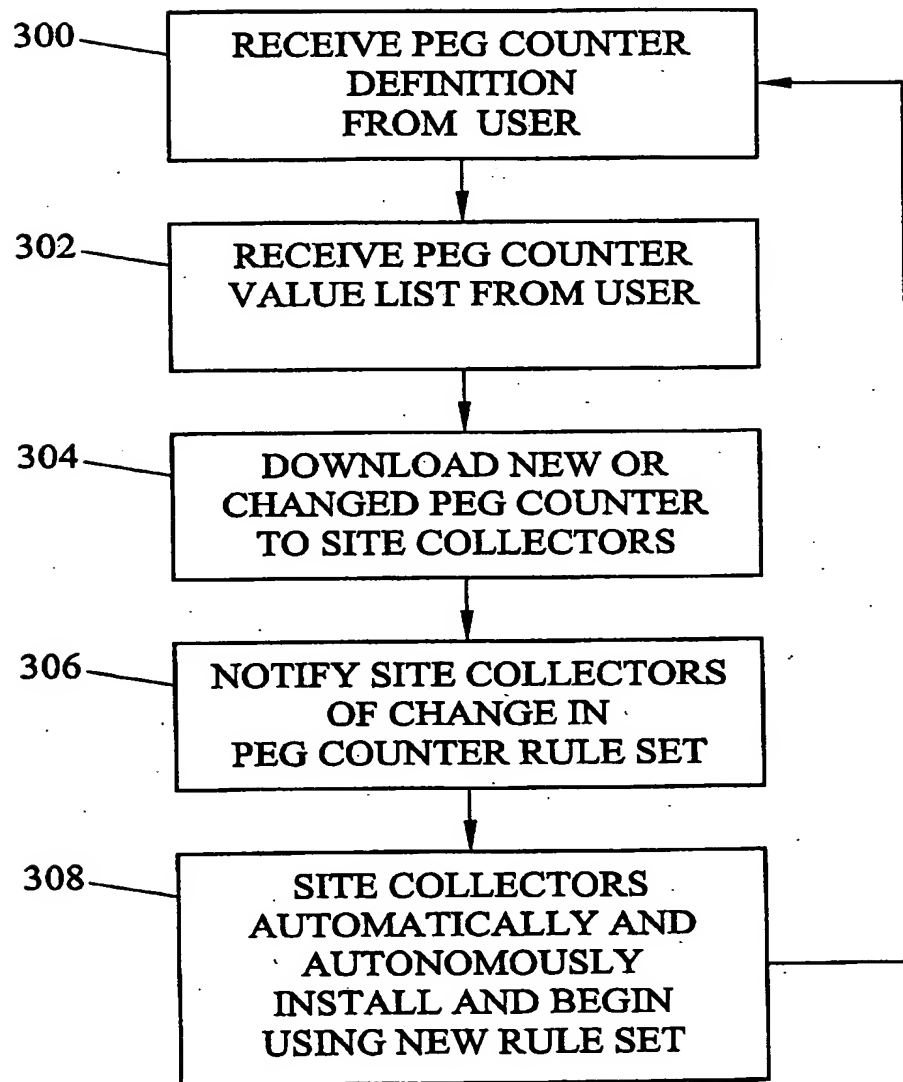


FIG. 3

'IAM_Ctr' Configuration

430 Submit Change Delete Cancel

400 IAM_Ctr (76) Service Indicator: ANSI ISUP

402 Message Type: Initial Address Direction: BOTH

404 Instance Type: Point Code State: Disabled

406 Point Code Mask: All Seg

414 MSU Parameters

None Edit Field

None

OPC

DPC

Network Type

SubSvc

428

416 Comparator: [Not Applicable]

418 Value:

420 valueList...

422 Add IF

424 Add ORIF

426 Remove

FIG. 4A

Submit Change

Delete

Cancel

Peg Counter Name:
IAM_Ctr
(76)

Service Indicator:
ANSI ISUP

Message Type:
Initial

Direction:
BOTH

Instance Type:
Address

State:
Disabled

Point Code Mask:
All Seg

Point Code
412

MSU Parameters
OPC

Comparator
None

Peg Count Criterion Edit Field
Then Increment Peg

Value:
418

422

424

426

420

valueList...

FIG. 4B

Submit Change

Delete

Cancel

ANSI GTA m7 Configuration

ANSI GTA m7 (94)

Peg Counter Name:

400

Unit data

Message Type:

402

GTA

Instance Type:

404

7

Originating Mask:

500

Service Indicator:

ANSI SSCP

408

Direction:

BOTH

410

State:

Disabled

412

7

Terminating Mask:

502

MSU Parameters

414

None

None

OPC

DPC

CalledTransType

CallingTransType

CalledAddr

CallingAddr

TCAPKpg

CalledSSN

CallingSSN

MAOpFam

None

None

OPC

DPC

CalledTransType

CallingTransType

CalledAddr

CallingAddr

TCAPKpg

CalledSSN

CallingSSN

MAOpFam

Comparator

Not Applicable

416

Value:

418

valueList...

420

Add IF

422

Add ORIF

424

Remove

426

FIG. 5A

ANSI GTA m7 Configuration

Submit Change

Delete

Cancel

Peg Counter Name:
ANSI_GTA_m7
(94)

Service Indicator:
ANSI SCCP

Message Type:
Unit data

Direction:
BOTH

Instance Type:
GTA

State:
Disabled

Originating Mask:
7

Terminating Mask:
7

414
MSU Parameters
CalledSSN

416
Comparator
None

418
Value:
253

420
valueList...

422
Peg Count Criterion Edit Field
IF Called Trans type is equal to 10
IF Called SSN is equal to 253
Then Increment Peg

424
Remove

FIG. 5B

'CNAM_Query' Configuration

430 Submit Change Delete Cancel

400 CNAM_Query (21) Service Indicator: ANSI SCCP 408

402 Peg Counter Name: Unit data: Direction: BOTH 410

404 Message Type: Instance Type: State: Enabled 412

500 GTA Terminating Mask: 7 502

414 MSU Parameters: None 416

418 Value:

420 valueList...

428 Peg Count Criterion Edit Field

IF Called Trans type is equal to 5
IF TCAPPkg Type is equal to 0xE2
IF Comp Type is equal to 0xE9
IF TCAPPramSet contains 0x97
Then Increment Peg

422 Add IF

424 Add ORIF

426 Remove

FIG. 5C

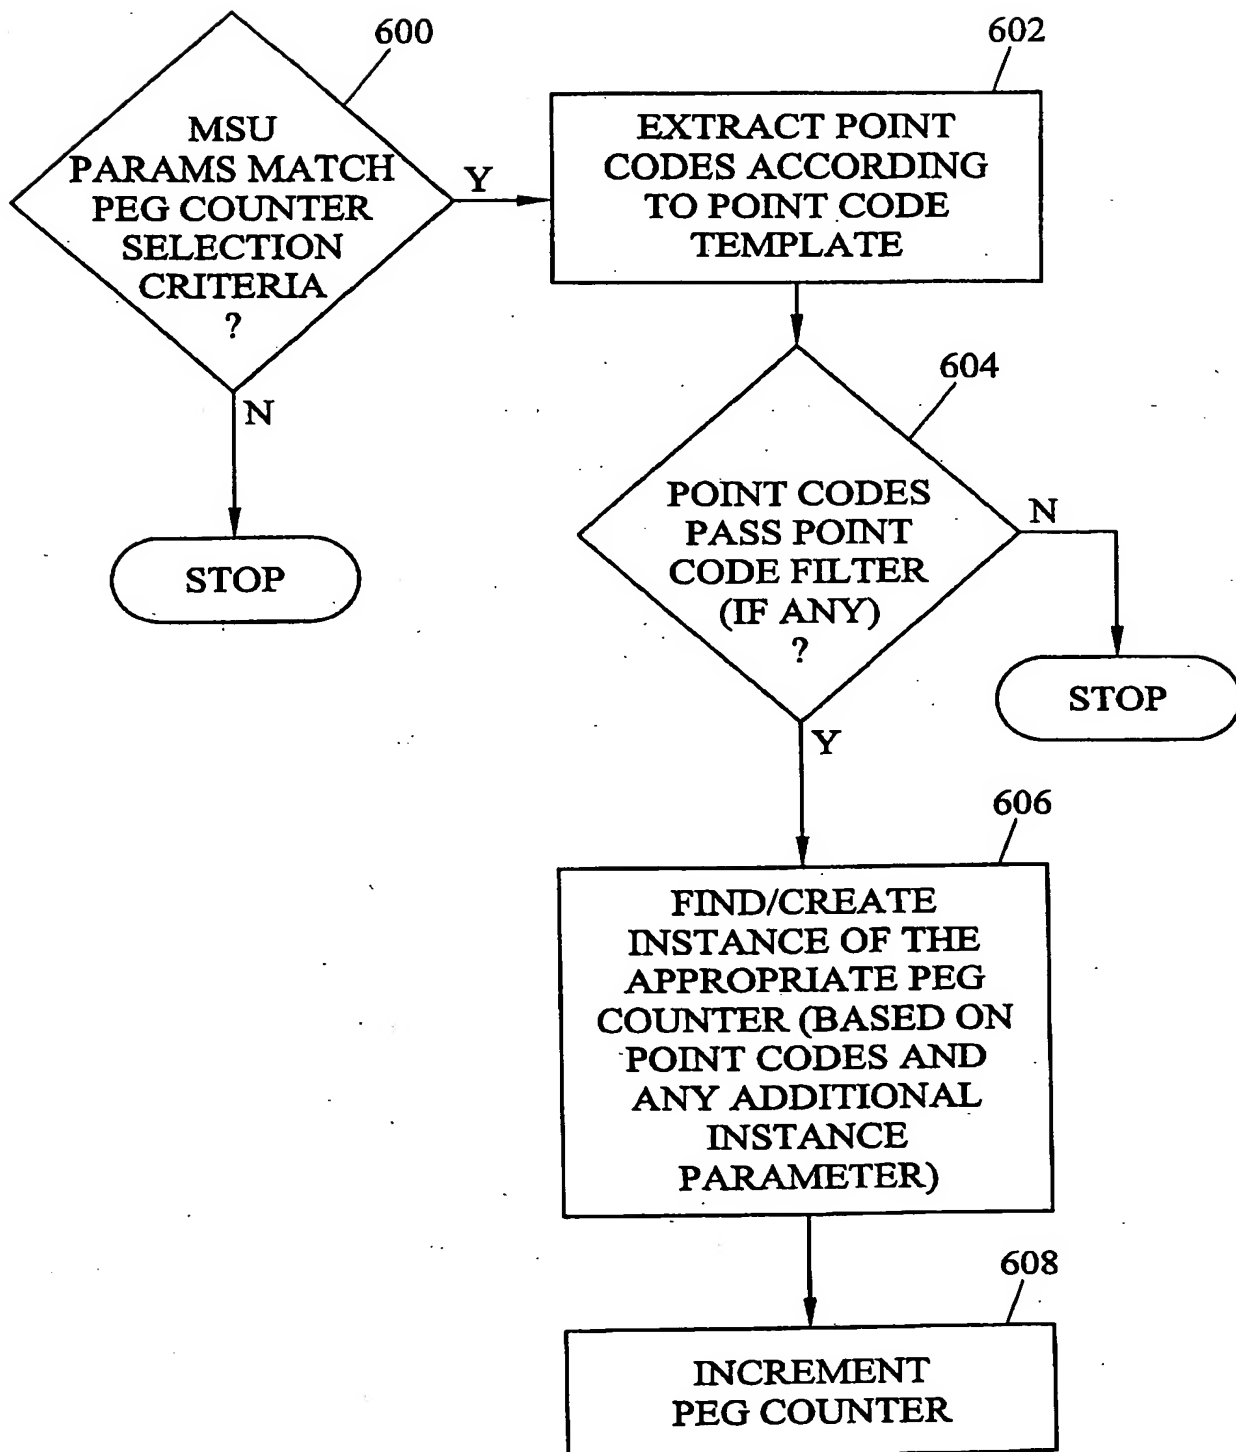


FIG. 6

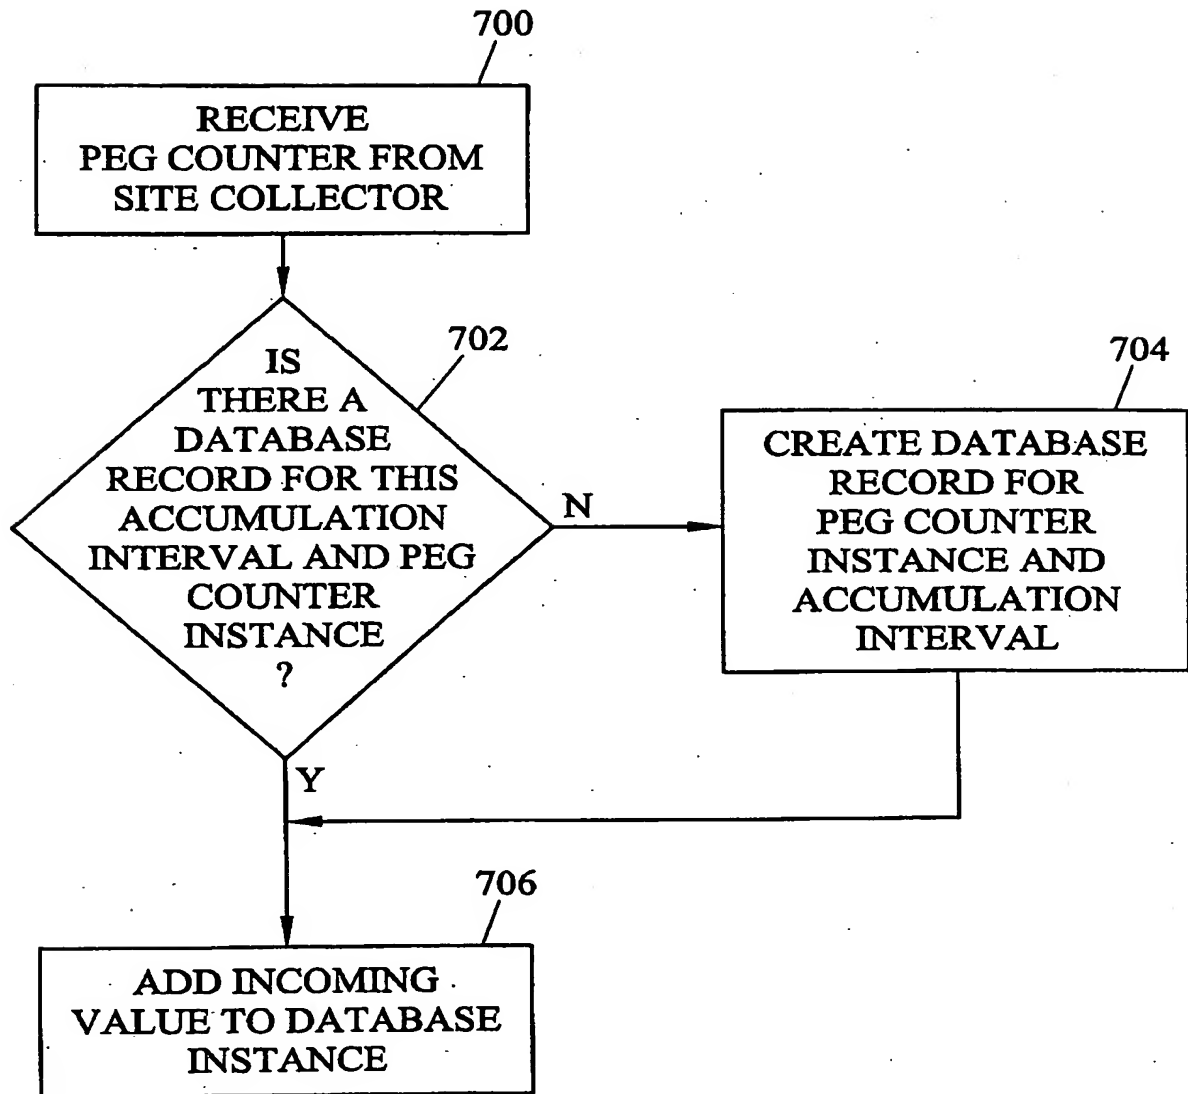


FIG. 7

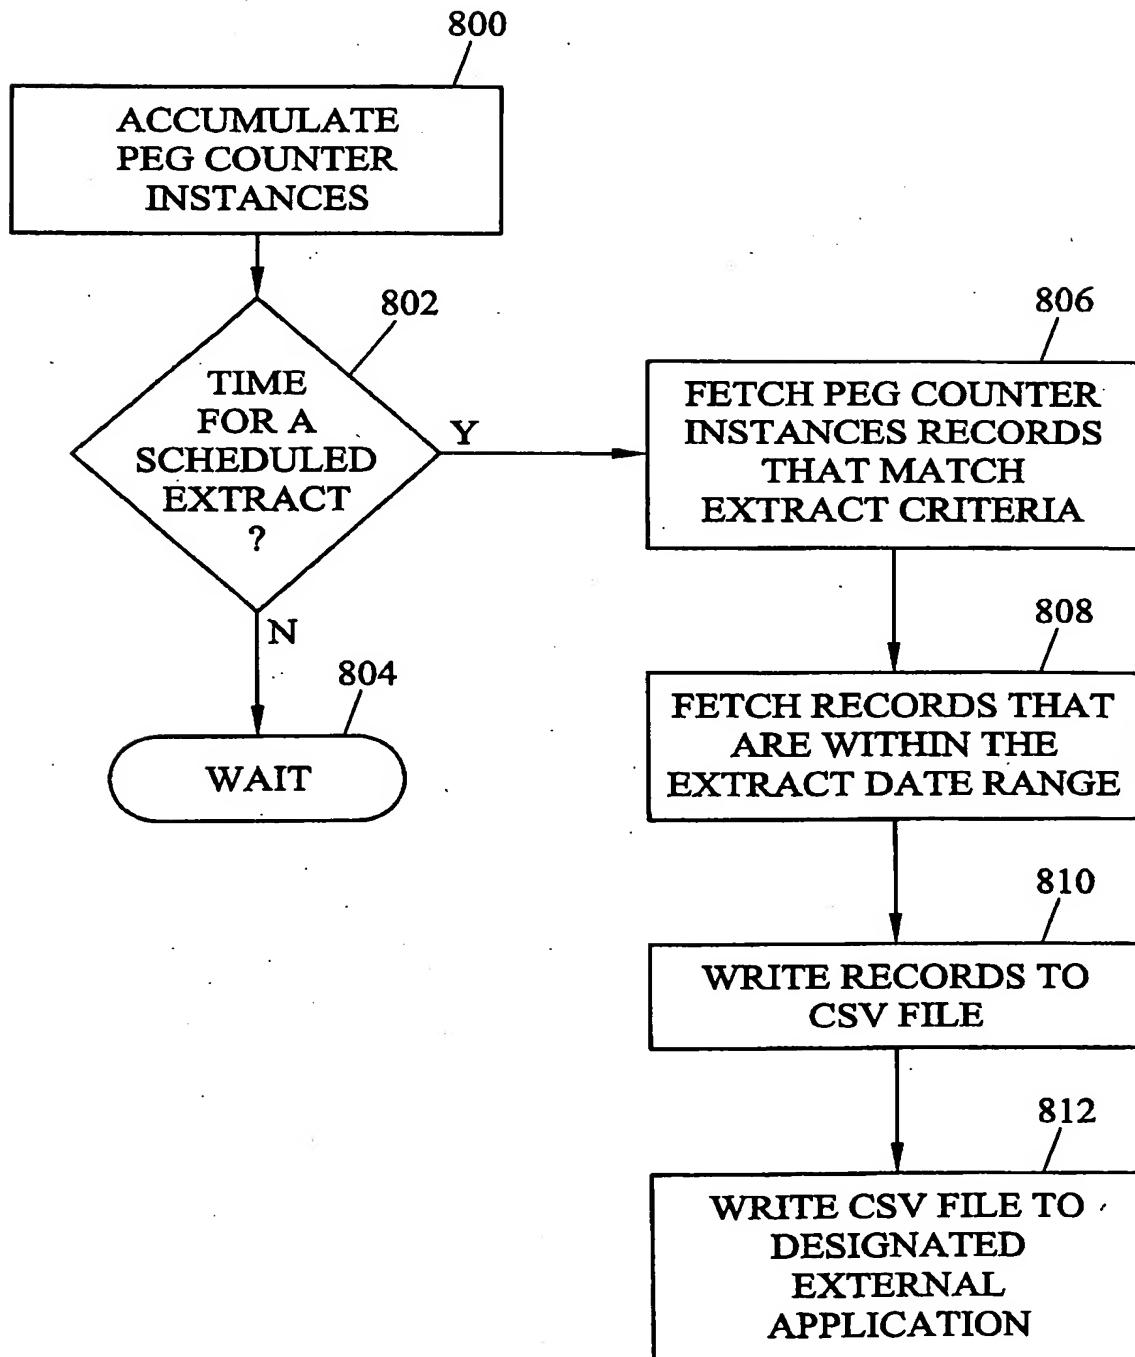


FIG. 8